




Complete Processing & Packaging Line Solutions

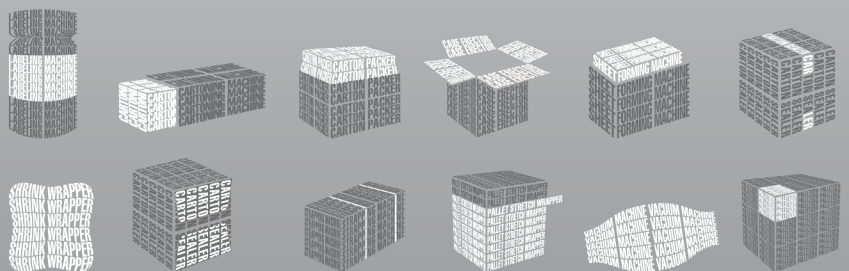

ABOUT LION PACKING SYSTEMS

Lion Packing Systems delivers complete food processing and packaging lines. With engineering and manufacturing in Tianjin and Zhejiang, China, and a sales office in Los Angeles, USA, we provide turnkey service — from plant layout and full production lines to installation, operator training and after-sales support.

More than a machine company

Beyond equipment, we provide professional consulting for fruit cup production — helping customers move from product and process design to a running line.



PALLET STRETCH WRAPPER



MH-FG-1000A Mechanical stretch automatic pallet stretch wrapper

Power	3P AC 380V 50 Hz 1P AC 220V, 50 Hz
Speed of turntable	0~10 rpm
Dia. of turntable	Φ1500 mm
Mast height	2400 mm
Capacity	1500 kg
Effective height	2000 mm
Packaging material	≤500 mm, ≤Φ280mm LLDPE W≤500 mm, outer dia.≤Φ280 mm LLDPE film
Machine dimension	L1500mm×W2440mm×H2475mm
Machine weight	550 kg



MH-FG-2000 Pre-stretch automatic pallet stretch wrapper

Power	1P AC 220V 50 Hz
Speed of turntable	0~10 rpm
Dia. of turntable	Φ1500 mm(optionalΦ1650/1800/2000/2200)))
Mast height	2400 mm(optional2000/2700/3000/3200/3400) .00
Capacity	2000 kg
Effective height	Mast height -400mm
Packaging material	≤500 mm, ≤Φ280mm LLDPE W≤500 mm, outer dia.≤Φ280 mm LLDPE film
Machine dimension	L1500mm×W2440mm×H2475mm



MH-FG-2000W Automatic pallet stretch wrapper(Horseshoe shaped)

Power	1P AC 220V 50 Hz
Speed of turntable	0~10 rpm
Dia. of turntable	Φ1500 mm(optionalΦ1650)
Forklift outer width	≤600mm
Direction	180°
Capacity	1000 kg
Mast height	2400 mm(optional2000/2700/3000/3200/3400)
Effective height	Mast height -400mm
Packaging material	≤500 mm, ≤Φ280mm LLDPE W≤500 mm, outer dia.≤Φ280 mm LLDPE film
Working height	500mm~Mast height-400mm



MH-FG-2000F Automatic pallet stretch wrapper

Power	1P AC 220/110 V 50/60 Hz
Air pressure	0.4~0.6 MPa
Speed of turntable	0~10 rpm
Dia. of turntable	Φ1650 mm(optional Φ1800/2000)
Mast height	2400 mm(optional 2700/3000/3200/3400)
Capacity	2000 kg
Effective height	Mast height -400mm
Packaging material	≤500 mm, ≤Φ280mm LLDPE W≤500 mm, outer dia.≤Φ280 mm LLDPE film

MH-FG-2000C1 With top-presser automatic pallet stretch wrapper

Power	1P AC 220V 50 Hz
Speed of turntable	0~10 rpm
Dia. of turntable	Φ1500 mm(optional Φ1650/1800/2000/2200)
Dia. of top-presser	Φ450 mm(optional Φ600/800)
Mast height	2400 mm(optional 2000/2700/3000/3200/3400)
Capacity	2000 kg
Effective height	Mast height -400mm
Packaging material	≤500 mm, ≤Φ280mm LLDPE W≤500 mm, outer dia.≤Φ280 mm LLDPE film
Working height	500mm~Mast height-400mm



MH-FG-2000C3 With top-presser automatic pallet stretch wrapper

Power	1P AC 220V 50 Hz
Speed of turntable	0~10 rpm
Dia. of turntable	Φ1500 mm(optional Φ1650/1800/2000/2200) Φ450 mm(optional Φ600/800)
Dia. of top-presser	
Mast height	2400 mm(optional 2000/2700/3000/3200/3400)
Capacity	2000 kg
Effective height	Mast height -400mm
Packaging material	≤500 mm, ≤Φ280mm LLDPE W≤500 mm, outer dia.≤Φ280 mm LLDPE film
Working height	500mm~Mast height-400mm



MH-FG-2000P
Pallet stretch wrapper(weighing function)

Power	1P AC 220V 50 Hz
Speed of turntable	0~10 rpm
Dia. of turntable	Φ1500mm (optional Φ1650/Φ1800)
Mast height	2400mm (optional 2000/2700/3000/3200/3400)
Packaging material	≤500 mm, ≤Φ280mm,LLDPE W≤500 mm, outer dia.≤Φ280 mm LLDPE film
Capacity	2000 kg
Effective height	Mast height -400mm
Weighing accuracy	100g



MH-FG-2000D
Automatic pallet stretch wrapper

Power	3P AC 380 V 50Hz
Air pressure	0.4~0.6 MPa
Speed of turntable	0~10 rpm
Dia. of turntable	Φ2000 mm
Table height	≥450 mm(roller-type)
Roller dia.	Φ76 mm
Mast height	2400 mm (optional 2000/2700/3000/3200/3400)
Capacity	2000 kg
Effective height	Mast height -400mm
Packaging material	≤500 mm, ≤Φ280mm LLDPE W≤500 mm, outer dia.≤Φ280 mm LLDPE film



MH-FG-2000D+MH-FG-2000RC
Pallet stretch wrapper

Power	3P AC 380 V 50Hz
Air pressure	0.4~0.6 MPa
Product specification	≤1200*1200 mm
Effective height	2400 mm (optional 2000/2700/3000/3200/3400)
Film	≤1800 mm, ≤Φ300mm PE W≤1800 mm, outer dia.≤Φ300 mm, PE film
Noise	
Environment	≤90%, -10~40℃
Optional	conveyor line



MH-FG-2300A Pallet stretch wrapper

Power	3P AC 380 V 50Hz
Air pressure	
Rotating speed	0~22 rpm
Rotating inner diameter	Φ1700 mm
Mast height	2400 mm (optional 2000/2700/3000/3200/3400)
Effective height	Mast height -400mm
Packaging material	≤500 mm, ≤Φ280mm,LLDPE W≤500 mm, outer dia.≤Φ280 mm LLDPE film

MH-FG-2300B Pallet stretch wrapper

Power	3P AC 380 V 50Hz
Rotating speed	0~15 rpm
Rotating inner diameter	Φ2000 mm
Mast height	3650 mm
Packaging material	≤500 mm, ≤Φ280mm,LLDPE W≤500 mm, outer dia.≤Φ280 mm LLDPE film
Machine dimension	L4000mm×W2000mm×H3100mm
Noise	≤75 dB(A)
Environment	humidity≤90%,Temp -10~40°C



MH-FG-2400 Arm rotation fixed wrapper

Power	3P AC 220 V 50Hz
Air pressure	
Rotating speed	0~12 rpm
Rotating inner diameter	Φ1700 mm
Mast height	2200 mm
Packaging material	≤500 mm, ≤Φ280mm,LLDPE W≤500 mm, outer dia.≤Φ280 mm LLDPE film
Machine dimension	L2080mm×W1640mm×H2850mm
Environment	humidity≤90%,Temp -10~40°C





MH-FG-700A Arm rotation forklift wrapper

Power Voltage	1P, AC 220V/110V, 50/60 Hz 1P AC 220/110V 50/60Hz
Speed of rotary	0~10 rpm 0~10 r/min
Rotating inner diameter	Φ1700 mm Φ1700mm
Forks width	540 mm
Capacity	2000 kg
Packaging material	≤500 mm, ≤Φ200 mm LLDPE Width≤500mm, outer diameter ≤Φ200mm, LLDPE film
Machine dimension	L1750×W1090×H2100
Noise	≤75 dB(A)
Environment	Humidity ≤ 90%, Temperature -10-40°C

MH-FG-800B Pallet stretch wrapper(top presser)

Power	1P AC 220V 50 Hz
Air pressure	0.4~0.6MPa
Speed of turntable	0~20 rpm
Dia. of turntable	
Air cylinder	500 mm
Capacity	60 kg
Packaging material	≤500 mm, ≤Φ280mm LLDPE W≤500 mm, outer dia.≤Φ280 mm LLDPE film
Noise	≤75 dB(A)
Environment	Humidity ≤ 90%, Temperature -10-40°C



MH-FG-900B Power pre-stretch automatic case stretch wrapper


Power	1P AC 220V 50 Hz
Speed of turntable	0~20 rpm
Effective width	400mm
Effective height	850mm
Valid package size	L(250-1200)mm×W(20-400)mm×H(200-850)mm
Capacity	60 kg
Packaging material	≤500 mm, ≤Φ200mm LLDPE W≤500 mm, outer dia.≤Φ200 mm LLDPE film
Machine dimension	L1600×W600×H1740



MH-CTP-600	Pallet wrapper
Power voltage	1P, AC 220V/110V, 50/60 Hz
Operating power	DC 24V
Battery capacity	80 Ah
Charge time	charge 7 hours can wrap 200 pallets
Around speed	90 m/min
Pallet Size	L600mm×W600mm~∞
Max wrapping height	2400 mm (option2800mm)
Film material	LLDPE , ≤500 mm, ≤Φ250 mm LLDPE film, width≤500mm,out diameter≤250mm



MH-CTR-060	Orbital wrapper
Power	1P AC 220 V 50Hz
Air pressure	0.4~0.6 MPa
Rotating speed	150rpm
Film width	76mm(3"), 102mm(4"), 127mm(5")
Table height	750 mm(adjustable)
Packaging ability (Round package)	Φ102~330mm
Packaging ability (Rectangular package)	width 102~550 mm, Min.height 50 mm, Max.diagonal 560 mm
Machine dimension	L1249mm×W1315mm×H1593mm
Machine weight	315kg

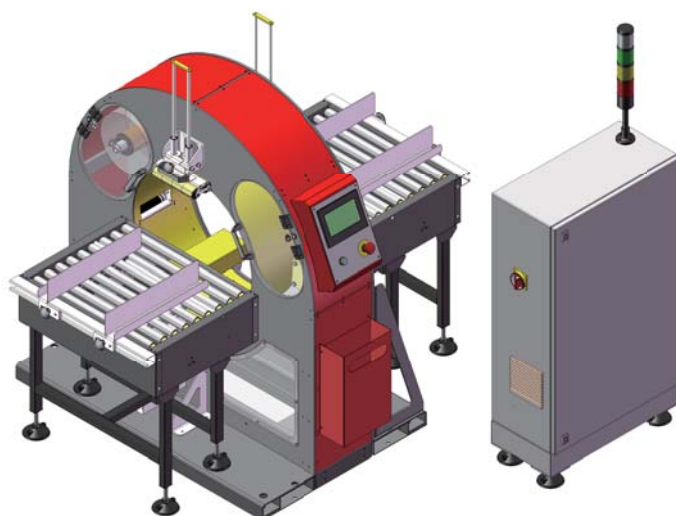

MH-CTR-200BD	Orbital wrapper
Speed	5-30 RPM
Transfer method	Friction wheel
Film width	250mm(10")
Pre-stretch percent	250%(adjustable)
Table height	850 mm(adjustable)
Packaging ability (Round package)	Φ900~1750mm
Packaging ability (Rectangular package)	width 750~1750 mm, Max.diagonal 1950mm L1630mm×W2725mm×H2725mm
Machine dimension	
Machine weight	1260kg

MH-FG-2100 Pallet stretch wrapper

Power	1P AC 220V 50 Hz
Speed of turntable	0~10 rpm
Dia. of turntable	Φ2000 mm
Mast height	450 mm
Mast height	2000 mm
Packaging material	≤500 mm, ≤Φ280mm,LLDPE W≤500 mm, outer dia.≤Φ280 mm LLDPE film
Capacity	1500 kg



MH-FG-2200 Horizontal pallet stretch wrapper for fabric

Power	1P AC 220 V 50Hz
Air pressure	0.4~0.6 MPa
Speed of roller	24 m/min
Height of roller	500mm
Diameter of roller	Φ160 mm
Capacity	1500 kg
Applicable products	Dia.Φ500-1200mm,length 400-2200mm
Packaging material	≤500 mm, ≤Φ280mm LLDPE W≤500 mm, outer dia.≤Φ280 mm LLDPE film
Machine dimension	L3100×W1450×H1300



Optional stretch carriage



AS
SIAT plate anti-stretch
carriage



Belt anti-stretch
carriage



AX
Side friction sheet
anti-stretch carriage



AE
Megnetic anti-stretch
carriage



B
Normal pre-stretch
carriage



BX
Two-sections pre-stretch
carriage



BL
Double motor carriage



Lion Packing Systems

Engineering & Manufacturing	Tianjin & Zhejiang, China
Sales Office	Los Angeles, California, USA
Tel	+1 314 250-8276
Web	lionpackingsystems.com
Email	sales@lionpackingsystems.com

Turnkey Service

- Plant layout design
- Complete processing & packaging lines
- Packing & packaging material supply
- Installation, commissioning & operator training
- After-sales service & spare parts

Lines Running In

China • Thailand • Mexico • Peru